

BRIGGS&STRATTON benzinski motor LINZ alternator




Model	Standby		Prime	
	kVA	KW	kVA	kW
TB.80.TR	8	6,4	7	5,6

Standby power rating is for the supply of emergency power at variable load for the duration of the non-availability of the mains. No overload capacity is available at this rating. A standby rated engine should be sized for an average load factor of 80% based on published standby rating for 500 oper. hours per year. Standby ratings should never be applied except in true emergency power failure conditions.

Prime power rating is available for unlimited hours per year with a variable load of which the average engine load factor is 80% of the published power rating, incorporation of a 10% overload for 1 hour in every 12 hours of operation which permitted

Continuous power rating is available for continuous full load operation. No overload is permitted.

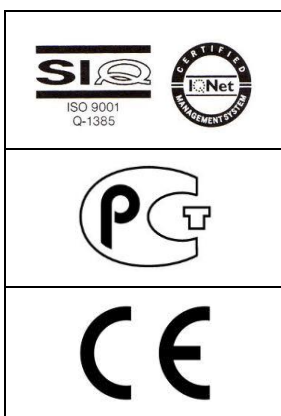

Standardna oprema agregata

- ✓ Robusni cevni ram sa antivibracionim amortizerima
- ✓ Profesionalni BRIGGS&STRATTON motor
- ✓ Ručno startovanje na potez
- ✓ 1 x monofazne šuko utičnice 16A
- ✓ 1 x trofazna utičnica 32A
- ✓ Sincro generator, samopobudni, sa četkicama
- ✓ Dnevni rezervoar 6,6l
- ✓ Fabrički test ispitivanja pod opterećenjem
- ✓ Termička zaštita generatora
- ✓ Senzor pritiska ulja

Opcionalna dodatna oprema

- Elektrostarter sa akumulatorskim baterijama
- Ručke i točkovi za lakšu manipulaciju
- Digitalni multimetar
- Zvučnoizolovano kućište
- Bočni deflektori za prigušenje buke

Benzinski motor

Proizvodjač	Briggs&Stratton(Japan)
Seriya i Tip	2100, 25T2
Snaga	14HP
Zapremina	400 ccm
Broj obrtaja	3000
Regulacija broja obrt.	mehanička
Specifična potrošnja goriva	235 g/kWh

Generator

Proizvodjač	Linz
Model	E1S13 SA/4
Tip	Sa četkicama
Regulacija napona	+/- 5%
Pobuda	Kondenzatorska

Dimenzije

D x Š x V	740mm x 540xx x 550mm
Masa	67 kg
Nivo buke	Lpa 78dBA