

HONDA GX690 motor
MECCALTE | SINCR0 alternator



Standardna oprema agregata

- ✓ Robusni cevni ram sa antivibracionim amortizerima
- ✓ Profesionalni HONDA motor
- ✓ Ručno startovanje
- ✓ 1 x monofazne šuko utičnice 16A
- ✓ 1 x monofazna CEE 32A
- ✓ 1 x trofazna CEE 32A
- ✓ MeccAlte generator, samopobudni, sa četkicama
- ✓ Rezervoar ekstra kapaciteta 16 litara
- ✓ Fabrički test ispitivanja pod opterećenjem

Opcionalna dodatna oprema

- Ručke i točkovi za lakšu manipulaciju
- Senzor niskog pritiska
- Digitalni multimetar
- Zvučnoizolovano kućište
- Bočni deflektori za prigušenje buke

| Model | Standby | | Prime | |
|-----------|---------|------|-------|------|
| | kVA | KW | kVA | kW |
| TH.160.TE | 16 | 12,8 | 14,5 | 11,6 |


Standby power rating is for the supply of emergency power at variable load for the duration of the non-availability of the mains.

No overload capacity is available at this rating.

A standby rated engine should be sized for an average load factor of 80% based on published standby rating for 500 oper. hours per year. Standby ratings should never be applied except in true emergency power failure conditions.

Prime power rating is available for unlimited hours per year with a variable load of which the average engine load factor is 80% of the published power rating, incorporation of a 10% overload for 1 hour in every 12 hours of operation which permitted

Continuous power rating is available for continuous full load operation No overload is permitted.

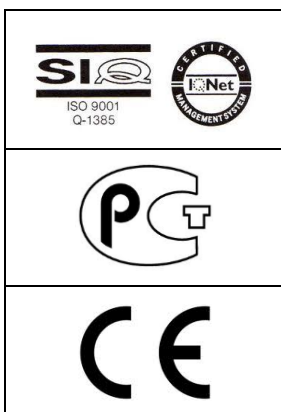

Benzinski motor

| | |
|-----------------------------|------------------------|
| Proizvodjač | Honda (Japan) |
| Tip | GX690 |
| Snaga | 26HP |
| Zapremina | 690ccm |
| Broj obrtaja | 3000 |
| Regulacija broja obrt. | mehanička |
| Specifična potrošnja goriva | 335g/kWh (3,7 lit/čas) |

Generator

| | |
|-------------------|---------------------|
| Proizvodjač | Mecc Alte (Italija) |
| Model | T20F-200 |
| Tip | Bez četkica |
| Regulacija napona | +/- 5% |
| Pobuda | Kompaundna |

Dimenzije

| | |
|-----------|-----------------------|
| D x Š x V | 880mm x 575xx x 705mm |
| Masa | 126kg |
| Nivo buke | 102 dBA@7m |